



033403 #4/3
2"

033401 45LT
1-15/16"

053403 #5
2-15/16"

013403 1A
1-5/16"

063417 20LT
1-7/16"

013409 10LT
1-3/16"

013414 1-1/4"
1-5/16"

013405 30LT
1-11/16"



033403 #4/3
2-1/4"

033401 45LT
2-1/8"

053403 #5
3-3/8"

013403 1A
1-1/2"


063417 20LT
1-7/8"

013405 30LT
2"

013409 10LT
1-7/16"

013414 1-1/4"
1-5/8"

Swivel Dimensions

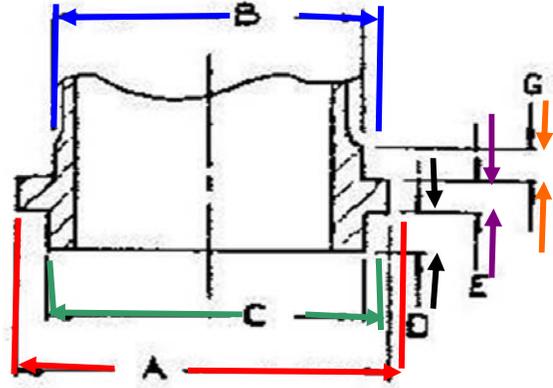

SWIVEL


GPS

GAS Products Sales, Inc.

Thomas V. Gobin 314.520.7362
 tgobin@gasproductssales.com


Connection Size	A Diameter	B Diameter	C Diameter	D Height	E Thickness	G Thickness
5LT	1"	27/32"	3/4"	5/32"	1/8"	7/64"
10LT	1-5/16"	1-3/32"	1"	5/32"	1/8"	1/8"
#1 Sprague	1-15/32"	1-5/16"	1"	3/16"	5/32"	3/16"
1" Pittsburgh	1-15/32"	1-5/16"	1"	3/16"	5/32"	3/16"
20LT	1-11/16"	1-3/8"	1-5/16"	3/16"	5/32"	5/32"
#2 Sprague	1-3/4"	1-5/8"	1-15/64"	3/16"	7/32"	7/32"
30LT	1-29/32"	1-21/32"	1-1/2"	1/4"	5/32"	11/64"
45LT	2-1/8"	1-29/32"	1-45/64"	1/4"	5/32"	3/16"
#4 Sprague	2-7/32"	1-61/64"	1-1/2"	3/16"	3/16"	3/8"
60LT	2-5/16"	1-29/32"	1-29/32"	1/4"	5/32"	3/16"
100LT	2-27/32"	2-13/32"	2-7/32"	1/4"	3/16"	1/4"
#5 Sprague	3-1/4"	2-27/32"	2-5/16"	1/4"	1/4"	1/4"

Connection Nut Dimensions

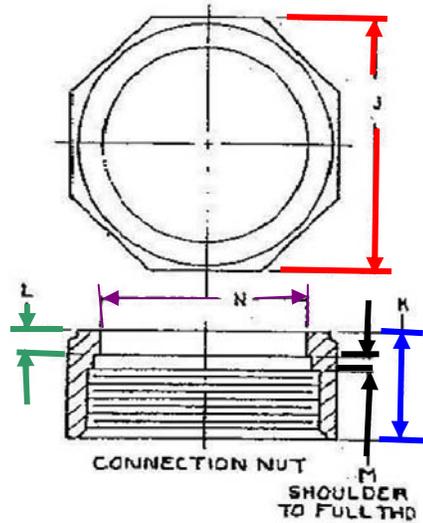

Connection Size	J Flats	Style	K Height	L Thickness	M Height (MAX)	N Diameter
5LT	1-19/64"	Octagon	11/16"	1/8"	5/32"	7/8"
10LT	1-39/64"	Octagon	11/16"	9/64"	5/32"	1-5/32"
#1 Sprague	1-7/8"	Hexagon	27/32"	5/32"	7/32"	1-11/32"
1" Pittsburgh	1-7/8"	Hexagon	7/8"	3/16"	3/16"	1-11/32"
20LT	2"	Octagon	13/16"	5/32"	3/16"	1-13/32"
#2 Sprague	2-7/32"	Hexagon	31/32"	5/32"	1/4"	1-43/64"
30LT	2-7/32"	Octagon	29/32"	11/64"	3/16"	1-11/16"
45LT	2-1/2"	Octagon	31/32"	3/16"	3/16"	1-15/16"
#4 Sprague	2-13/16"	Octagon	1-1/16"	1/4"	7/32"	2"
60LT	2-41/64"	Octagon	31/32"	3/16"	3/16"	1-15/16"
100LT	3-7/16"	Octagon	13/16"	1/4"	3/16"	2-7/16"
#5 Sprague	3-55/34"	Hexagon	1-7/16"	19/64"	7/32"	2-31/32"

Connection Hubs Dimensions

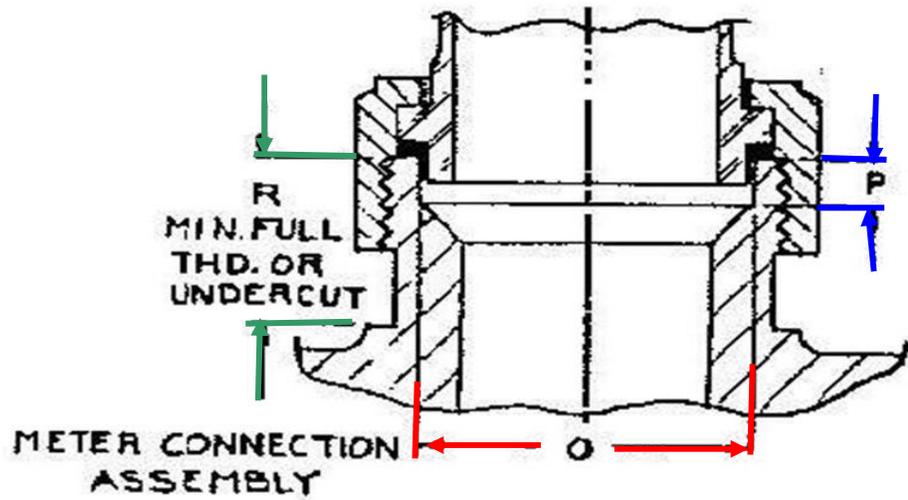

Connection Size	O Diameter	P Thickness (MIN)	R Height (MIN)
5LT	13/16"	7/32"	7/16"
10LT	1-1/13"	7/32"	7/16"
#1 Sprague	1-1/13"	1/4"	17/32"
1" Pittsburgh	1-1/8"	1/4"	17/32"
20LT	1-11/32"	1/4"	1/2"
#2 Sprague	1-5/16"	1/4"	19/32"
30LT	1-35/64"	5/16"	19/32"
45LT	1-3/4"	5/16"	5/8"
#4 Sprague	1-19/32"	1/4"	5/8"
60LT		5/16"	5/8"
100LT	2-9/32"	7/16"	3/4"
#5 Sprague	2-3/8"	5/16"	7/8"

Thread Specifications

Connection Size	Threads Per Inch	Pipe Size Normally	External Major DIA	External Pitch DIA	External Minor DIA	Internal Major DIA (MIN)	Internal Pitch DIA	Internal Minor DIA
5LT	12	1/2"	1.1138 / 1.1310	1.0669 / 1.0769	1.0288	1.139	1.0849 / 1.0962	1.049 / 1.060
10LT	11 1/2	3/4"	1.4234 / 1.4411	1.3746 / 1.3846	1.3344	1.4491	1.3926 / 1.4043	1.355 / 1.367
#1 Sprague	12	1"	1.5759 / 1.5931	1.5290 / 1.5390	1.4909	1.6011	1.5470 / 1.5585	1.511 / 1.522
1" Pittsburgh	1 1/4" 11 1/2	1"	1.626 / 1.638	1.5756 / 1.5816			1.534 / 1.5912	1.546 / 1.555
20LT	11 1/2	1"	1.8164 / 1.8343	1.7676 / 1.7776	1.7274	1.421	1.7856 / 1.7974	1.748 / 1.760
#2 Sprague	11 1/2	1-1/4"	1.8578 / 1.8755	1.8090 / 1.8190	1.7688	1.8835	1.8270 / 1.8390	1.789 / 1.801
30LT	11 1/2	1-1/4"	2.0348 / 2.0525	1.9860 / 1.9960	1.9458	2.0605	2.0040 / 2.0160	1.966 / 1.978
45LT	11 1/2	1-1/2"	2.2543 / 2.2720	2.2055 / 2.2155	2.1653	2.28	2.2235 / 2.2358	2.186 / 2.198
#4 Sprague	11 1/2	1-1/2"	2.3208 / 2.3385	2.2720 / 2.2820	2.2318	2.3465	2.2900 / 2.3023	2.252 / 2.265
60LT	11 1/2	1-1/2"	2.4253 / 2.4430	2.3765 / 2.3865	2.3363	2.451	2.3945 / 2.4068	2.357 / 2.369
#5 Sprague	8	2"	3.4407 / 3.4632	3.3706 / 3.3820	3.3098	3.4712	3.3900 / 3.4049	3.336 / 3.351